
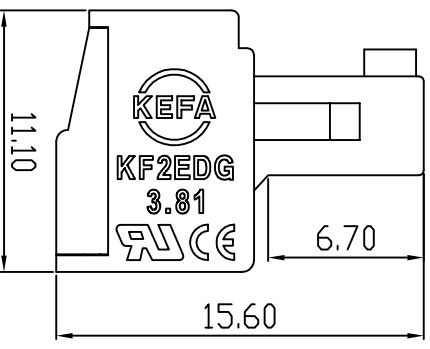
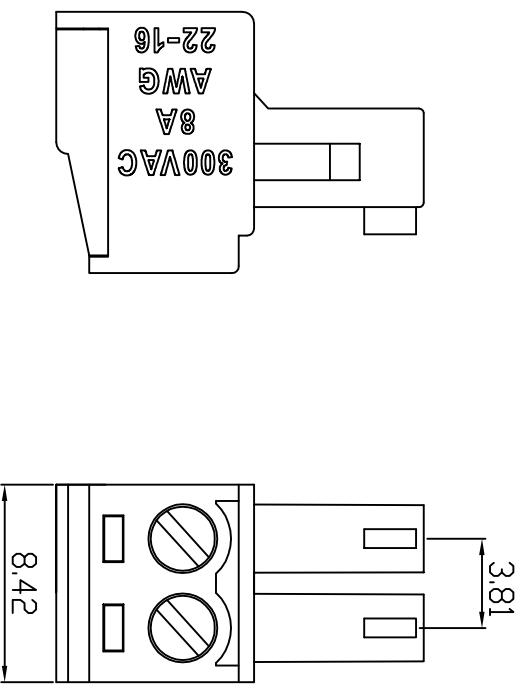


linear dimension (Tolerances Standard GB/T 14486-2008)		—		□		L	
variable range	to	over	to	over	to	over	to
6	6	10	30	60	100	160	10
	to	to	to	to	to	to	to
	10	30	60	100	160	10	100
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60
						0.10	0.30
							0.60

REVISION RECORD			
REV.	DESCRIPTION	ECN No.	APPROVED DATE
A	新发行	CLF	24.08.14



UL/CUL 技术参数

等级	Use Group	B	C	D
额定电压	Rated Voltage	V	300	300
额定电流	Rated Current	A	8	10
接线范围	Wire Range	28-16		
单/多芯线	Solid/Stranded	AWG		
耐电压	Withstanding Voltage	1600V/1Min		

IEC 技术参数


过电压类别	Overvoltage Category	III	III	II
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage	V	160	320
额定电流	Rated Current	A	7	7
额定冲击电压	Rated impulse withstand voltage	kV	-	2.5
导线截面积	Conductor cross section	mm ²	1.5	
硬质/柔性导线	Solid/flexible			

材料

绝缘材料	Insulation Material	PA66
阻燃等级	Inflammability	UL94V-0
导体材料	Contact Material	铜合金 Copper alloy
导体表面镀层	Contactive Coating	镀镍 Ni plated

一般参数

间距 Pitch	[mm]	3.81
极数 Poles	[P]	2
剥线长度 Stripping Length	[mm]	7.8
螺丝 Screw/扭矩 Torque(Max)	[N.m]	M2.0/2
工作温度 Operating temperatur	[°C]	-40~+105
引脚尺寸 Pin Dimensions	[mm]	-
PCB板孔径 PCB Hole Diameter	[mm]	-

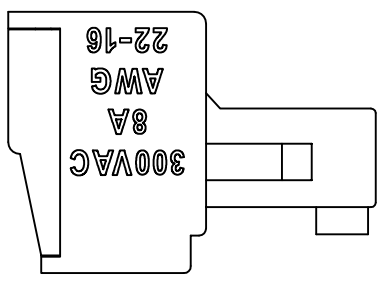

DES.	FGG	DATE	24.08.14	单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	1:1	第三视角/THIRD ANGLE PROJECTION	版本 / REV	A
CHK.	CLF	DATE	24.08.14	APP.	CLF	DATE	24.08.14	 慈溪市科发电子有限公司 CIXI KEFA ELECTRONIC CO., LTD				
名称 / TITLE												
KF2EDGK-3.81												