

## ALUMINUM ELECTROLYTIC CAPACITORS

APPROVAL NO.

6496

BXJ 50 VC 220 (M)

SERIES

BXJ



RATING

50 V 220  $\mu$ F


CASE SIZE

 $\varnothing$  10 × 10 L


## A. DIAGRAM OF DIMENSIONS

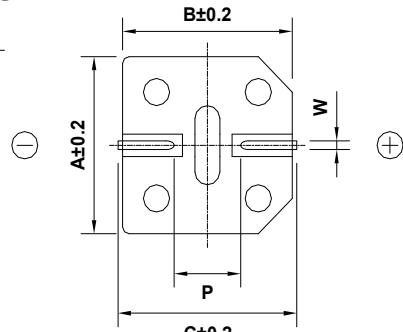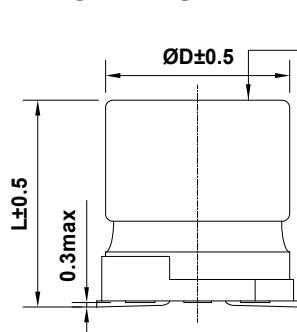

Recommended Solder land on PC board



■ : Solder land on PC board

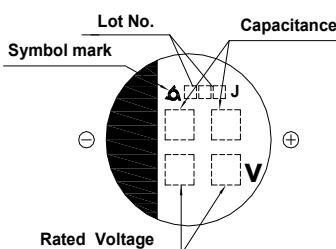

Case code	$\varnothing$ D	L	A	B	C	W	P	a	b	c
J10	10	10	10.3	10.3	11.0	0.7-1.1	4.5	4.5	4.4	3.5

## B. ELECTRICAL CHARACTERISTICS

A. OPERATING TEMPERATURE RANGE	: -55 ~ +105 °C
B. RATED VOLTAGE	: 50 V <sub>DC</sub>
C. SURGE VOLTAGE	: 63 V <sub>DC</sub>
D. CAPACITANCE TOLERANCE	: ± 20% at 20 °C, 120Hz
E. LEAKAGE CURRENT	: Lower 110 $\mu$ A, after 2 minutes at 20 °C
F. DISSIPATION FACTOR (TAN $\delta$ )	: Lower 0.12 at 20 °C, 120Hz
G. MAX. RIPPLE CURRENT	: 500 mArms at 105 °C, 100kHz
H. TEMPERATURE CHARACTERISTIC (Max. Impedance ratio)	: Z(-25 °C) / Z(20 °C) = 2 Z(-55 °C) / Z(20 °C) = 3 (at 120Hz)

I. LOAD LIFE : The following specifications shall be satisfied when the capacitors are restored to 20 °C after the rated voltage is applied for 5,000 hours at 105 °C.

- # Capacitance change ≤ ±35 % of the initial value
- # Tan $\delta$  ≤ 300 % of the initial specified value
- # Leakage Current ≤ The initial specified value

J. SHELF LIFE : The following specifications shall be satisfied when the capacitors are restored to 20 °C after exposing them for 1,000 hours at 105 °C without voltage applied.

The rated voltage shall be applied to the capacitors for a minimum of 30 minutes, at least 24 hours and not more than 48 hours before the measurement.

- # Capacitance change ≤ ±35 % of the initial value
- # Tan $\delta$  ≤ 300 % of the initial specified value
- # Leakage Current ≤ The initial specified value

K. CLEANING CONDITIONS : Solvent - proof

L. OTHERS : Satisfied characteristics KS C IEC 60384-4

\* IMP.(20 °C, 100kHz) : 0.25 ( $\Omega$ ) ↓



SamYoung Electronics Co., Ltd.